

Stelo 160

Wall-mounted glass luminaire

Description

Wall-mounted luminaire creates diffused illumination. Diffuser made of hand blown three-layered opal glass. Mounting plate made of metal painted matte white.

Installation


On a wall.

Design

Wall-mounted luminaire. The diffuser is attached to a metal plate using special latches. Sockets are installed on the plate.

Optical part

Opal diffuser.

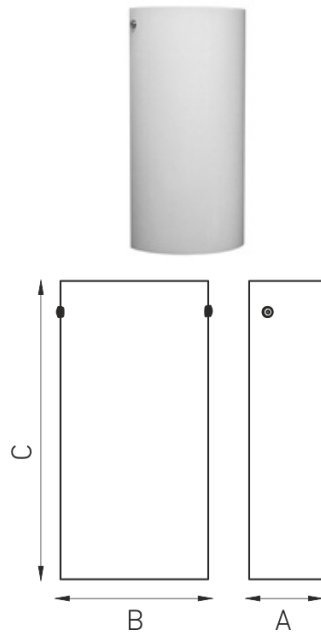

Dimensional characteristics

A	Length	300 mm
B	Width	150 mm
C	Height	75 mm
D	Length (mounting)	170 mm
E	Width (mounting)	40 mm
	Weight	0.7 kg

Technical features

1	Article no.	1549000020
2	Light source	IL
3	Luminous flux	710 lm
4	Power compatibility	60 W
5	Energy efficiency	9 lm/W
6	Color rendering index (CRI)	-
7	Color temperature	-
8	Power factor (cosFI)	= 1,00
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	I
13	Electromagnetic compatibility (EMC)	Yes
14	Climate application	Clm App4
15	Ambient temperature	+5 to +35 C
16	Housing color	White
17	Fire protection class	III
18	Flickering	<15%
19	Ingress protection (IP)	IP20
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	E
22	Inrush current	-
23	Inrush current impulse time	0 µs
24	Emergency power supply unit	No
25	Beam angle	D120
26	Warranty	36 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-