

STOCK ADVANTAGE 454 IP54 HF with tempered glass

Fluorescent luminaires for high ceilings



Description

Highly efficient industrial luminaire for plant floors and storage facilities with ceilings higher than 12 m. Available with IP54 and IP65 ratings. Can be suspended on Y chains. T5 fluorescent lamps are used as the light source.

Installation



Mounted on the ceiling surface using universal mounting angles (included) or suspended on chains (the suspension kit is ordered separately). Order code for the Y chain suspension kit (max. length 1.5 m): 2348000020.

Design

Black powder-painted weld sheet steel housing. Control gear is installed inside the housing.

Optical part

MIRO4 (ALANOD) anodized aluminum reflector. The STOCK ADVANTAGE versions with IP54 and IP65 protection have a polycarbonate or clear tempered glass reflector.

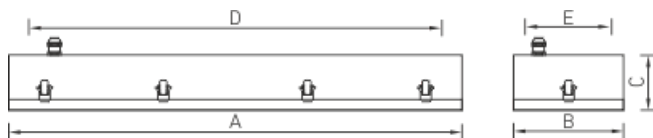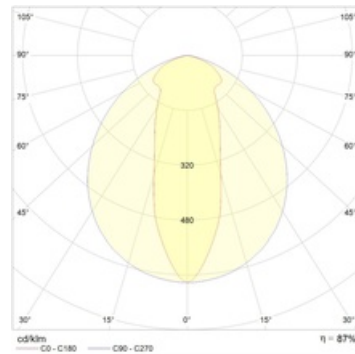

Dimensional characteristics

A	Length	1376 mm
B	Width	537 mm
C	Height	114 mm
D	Length (mounting)	1150 mm
E	Width (mounting)	356 mm
	Weight	16.1 kg

Technical features

1	Article no.	1347001500
2	Light source	FL
3	Socle	G5
4	Number of Lamps	4
5	Power compatibility	216 W
6	Ballast	ECG
7	Dimming	-
8	Power factor (cosFI)	> 0,96
9	Alternating/direct current (AC/DC)	No
10	Rated voltage	230 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	Clm App2
14	Ambient temperature	-20 to +40 C
15	Housing color	Black
16	Fire protection class	II
17	Flickering	<5%
18	Ingress protection (IP)	IP54
19	Mechanical shock protection	IK02/0,2 J
20	Energy efficiency class	A...A+
21	Emergency power supply unit	No
22	Beam angle	-
23	Warranty	36 months