

## TILE T 33 WH D30 4000K /E/

Track-mounted LED luminaire

### Description

Track LED downlight. The body is made of plastic. Standard color WH – white. The lens used as the optical element, the standard angle of the optical element – 45 degr. There are special versions for lighting in supermarkets with dedicated LEDs.

### Installation


Track LED downlight

### Design

The body is made of aluminium. Body painted matte white. Lens or reflector is optical element.

### Optical part

Lens

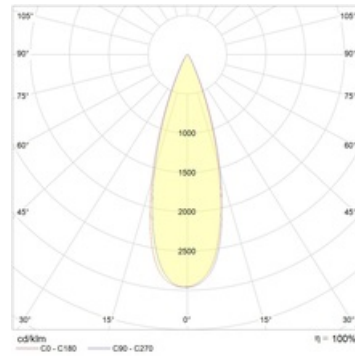

### Dimensional characteristics

A	Diameter	109 mm
C	Height	249 mm
D	Length (mounting)	125 mm
	Weight	1.3 kg

## Technical features

1	Article no.	1997025250
2	Light source	LED
3	Luminous flux	4150 lm
4	Power compatibility	37 W
5	Energy efficiency	112 lm/W
6	Color rendering index (CRI)	>80
7	Color temperature	4000 K
8	Power factor (cosFI)	> 0,90
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	I
13	Electromagnetic compatibility (EMC)	Yes
14	Climate application	Clim App4
15	Ambient temperature	+5 to +35 C
16	Housing color	White
17	Fire protection class	-
18	Flickering	<5%
19	Ingress protection (IP)	IP20
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	A+
22	Inrush current	60 A
23	Inrush current impulse time	300 µs
24	Emergency power supply unit	No
25	Beam angle	D30
26	Warranty	60 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-