

# UFO DL LED 35 D10 4000K /E/

Directional luminaire

## Description

Exclusively-styled rotary recessed luminaire. The compact size and a choice of reflector angles from narrow to medium give an immense freedom to create unique and memorable interiors.

## Installation



Installed recessed in Armstrong type suspended ceilings or plasterboard ceilings.

## Design

Powder-painted extruded aluminum body. External driver. The optical part can be tilted up to 90 degrees from the horizontal and up to 355 degrees from the vertical.

## Optical part

LED type: COB. Hybrid lens with 10, 24 and 45 degrees beam angles.

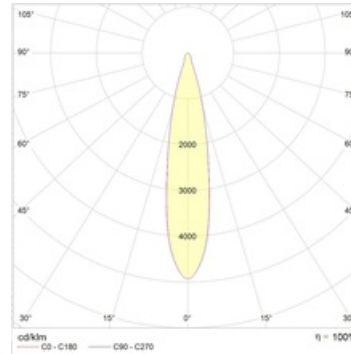

### Dimensional characteristics

|   |                     |        |
|---|---------------------|--------|
| A | Diameter            | 170 mm |
| C | Height              | 106 mm |
| D | Diameter (mounting) | 170 mm |
|   | Weight              | 1.8 kg |

## Technical features

|    |                                     |             |
|----|-------------------------------------|-------------|
| 1  | Article no.                         | 1997019290  |
| 2  | Light source                        | LED         |
| 3  | Luminous flux                       | 3700 lm     |
| 4  | Power compatibility                 | 34 W        |
| 5  | Energy efficiency                   | 109 lm/W    |
| 6  | Color rendering index (CRI)         | >80         |
| 7  | Color temperature                   | 4000 K      |
| 8  | Power factor (cosFI)                | > 0,97      |
| 9  | Alternating/direct current (AC/DC)  | No          |
| 10 | Dimming                             | -           |
| 11 | Rated voltage                       | 230 V       |
| 12 | Electrical shock protection         | I           |
| 13 | Electromagnetic compatibility (EMC) | Yes         |
| 14 | Climate application                 | Clim App4   |
| 15 | Ambient temperature                 | +5 to +35 C |
| 16 | Housing color                       | White       |
| 17 | Fire protection class               | -           |
| 18 | Flickering                          | <5%         |
| 19 | Ingress protection (IP)             | IP20        |
| 20 | Mechanical shock protection         | IK02/0,2 J  |
| 21 | Energy efficiency class             | A+          |
| 22 | Inrush current                      | 5 A         |
| 23 | Inrush current impulse time         | 50 µs       |
| 24 | Emergency power supply unit         | No          |
| 25 | Beam angle                          | D10         |
| 26 | Warranty                            | 60 months   |
| 27 | Autonomy in emergency mode          | -           |
| 28 | Light flux in emergency mode        | -           |