

URAN 6500-4 LED

URAN series luminaires

Description

Emergency luminaires with an increased IP rating suitable for a wide range of applications. Can be operated at temperatures below zero.

Installation



Mounted on a wall or ceiling. The ST 35 accessory is supplied separately.

Design

Polycarbonate housing. An operational status LED is installed on the housing panel. Emergency lighting testing and control are performed from a TELEMANDO device. Rechargeable batteries are included.

Optical part

Polycarbonate diffuser. Pictograms for the luminaire and the double-sided ST 35 diffuser are supplied separately. Recognition distance 25 m. The lamps are included.

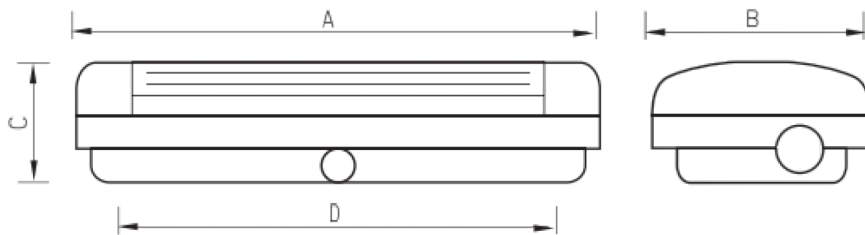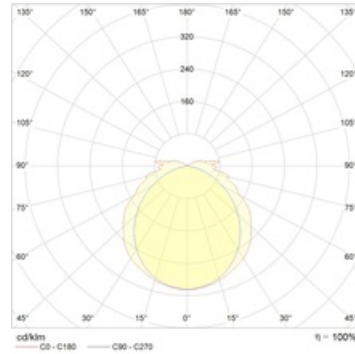

Dimensional characteristics

A	Length	335 mm
B	Width	125 mm
C	Height	65 mm
D	Length (mounting)	230 mm
	Weight	0.7 kg

Technical features

1	Article no.	4501007120
2	Light source	LED
3	Power compatibility	4 W
4	Power factor (cosFI)	-
5	Emergency power supply unit	No
6	Energy efficiency class	A
7	Color rendering index (CRI)	>70
8	Flickering	-
9	Luminous flux	200 lm
10	Battery Ni-Cd	No accumulator
11	Rated voltage	230 V
12	Electrical shock protection	II
13	Ambient temperature	-30 to +40 C
14	Climate application	CIm App2
15	Housing color	White
16	Fire protection class	-
17	Electromagnetic compatibility (EMC)	Yes
18	Ingress protection (IP)	IP65
19	Mechanical shock protection	IK02/0,2 J
20	Alternating/direct current (AC/DC)	Yes
21	Autonomy in emergency mode	-
22	Emerg. work type	central battery
23	Average brightness	300
24	Identification distance	25
25	Warranty	60 months
26	Light flux in emergency mode	220 lm