

URAN 6521-4 LED

URAN series luminaires

Description

Emergency luminaires with an increased IP rating suitable for a wide range of applications. Can be operated at temperatures below zero.

Installation



Mounted on a wall or ceiling. The ST 35 accessory is supplied separately.

Design

Polycarbonate housing. An operational status LED is installed on the housing panel. Emergency lighting testing and control are performed from a TELEMANDO device. Rechargeable batteries are included.

Optical part

Polycarbonate diffuser. Pictograms for the luminaire and the double-sided ST 35 diffuser are supplied separately. Recognition distance 25 m. The lamps are included.

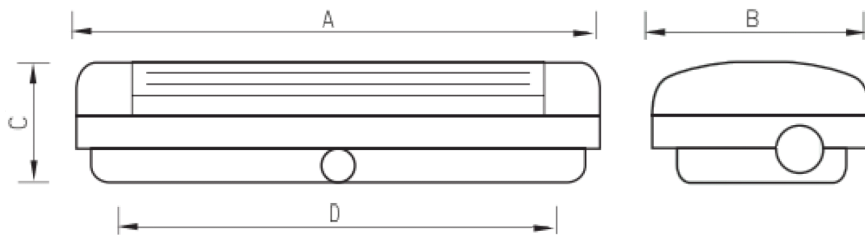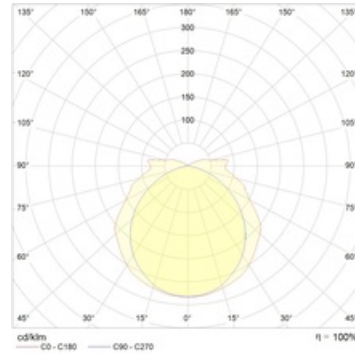

Dimensional characteristics

| | | |
|---|-------------------|--------|
| A | Length | 335 mm |
| B | Width | 125 mm |
| C | Height | 65 mm |
| D | Length (mounting) | 230 mm |
| | Weight | 1.1 kg |

Technical features

| | | |
|----|-------------------------------------|------------------------|
| 1 | Article no. | 4501006430 |
| 2 | Light source | LED |
| 3 | Power compatibility | 4 W |
| 4 | Power factor (cosFI) | - |
| 5 | Emergency power supply unit | No |
| 6 | Energy efficiency class | A+ |
| 7 | Color rendering index (CRI) | >75 |
| 8 | Flickering | - |
| 9 | Luminous flux | 275 lm |
| 10 | Battery Ni-Cd | RB 6,0 V 0,8 A*h Ni-Cd |
| 11 | Rated voltage | 230 V |
| 12 | Electrical shock protection | II |
| 13 | Ambient temperature | 0 to +40 C |
| 14 | Climate application | Clm App2 |
| 15 | Housing color | White |
| 16 | Fire protection class | - |
| 17 | Electromagnetic compatibility (EMC) | Yes |
| 18 | Ingress protection (IP) | IP65 |
| 19 | Mechanical shock protection | IK02/0,2 J |
| 20 | Alternating/direct current (AC/DC) | Yes |
| 21 | Autonomy in emergency mode | 1 |
| 22 | Emerg. work type | maintained |
| 23 | Average brightness | 300 |
| 24 | Identification distance | 25 |
| 25 | Warranty | 60 months |
| 26 | Light flux in emergency mode | 275 lm |