

## URAN 6523-4 LED

URAN series luminaires

### Description

Emergency luminaires with an increased IP rating suitable for a wide range of applications. Can be operated at temperatures below zero.

### Installation



Mounted on a wall or ceiling. The ST 35 accessory is supplied separately.

### Design

Polycarbonate housing. An operational status LED is installed on the housing panel. Emergency lighting testing and control are performed from a TELEMANDO device. Rechargeable batteries are included.

### Optical part

Polycarbonate diffuser. Pictograms for the luminaire and the double-sided ST 35 diffuser are supplied separately. Recognition distance 25 m. The lamps are included.

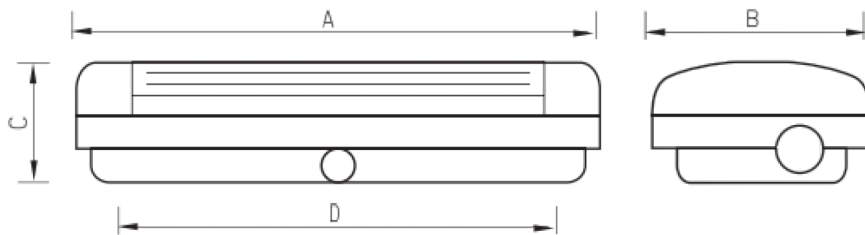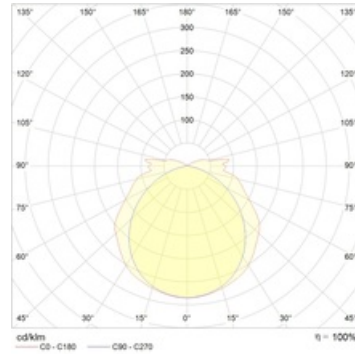

**Dimensional characteristics**

A	Length	335 mm
B	Width	125 mm
C	Height	65 mm
D	Length (mounting)	230 mm
	Weight	0.8 kg

**Technical features**

1	Article no.	4501006440
2	Light source	LED
3	Power compatibility	4 W
4	Power factor (cosFI)	-
5	Emergency power supply unit	No
6	Energy efficiency class	A
7	Color rendering index (CRI)	>75
8	Flickering	-
9	Luminous flux	225 lm
10	Battery Ni-Cd	RB 6,0 V 0,8 A*h Ni-Cd
11	Rated voltage	230 V
12	Electrical shock protection	II
13	Ambient temperature	0 to +40 C
14	Climate application	CIm App2
15	Housing color	White
16	Fire protection class	-
17	Electromagnetic compatibility (EMC)	Yes
18	Ingress protection (IP)	IP65
19	Mechanical shock protection	IK02/0,2 J
20	Alternating/direct current (AC/DC)	Yes
21	Autonomy in emergency mode	3
22	Emerg. work type	maintained
23	Average brightness	300
24	Identification distance	25
25	Warranty	60 months
26	Light flux in emergency mode	220 lm