

# Vista LED 6 CH 3000K

Wall-mounted directional luminaire



## Description

Wall-mounted spotlight luminaire. Aluminum housing painted white matte.

## Installation



Mounted on a wall.

## Design


Matte white painted aluminum housing.

## Optical part

Lens.

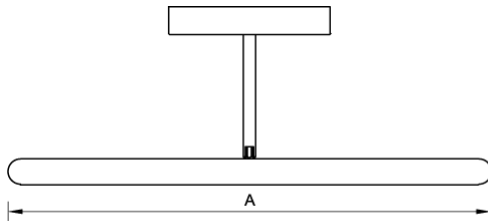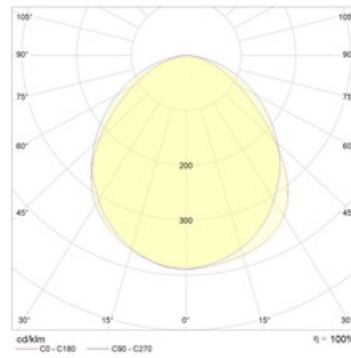

VISTA LED 5 CH 3000K  
VISTA LED 6 CH 3000K

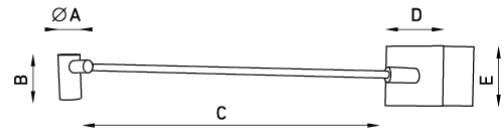

VISTA 3 4000K

## Dimensional characteristics

A	Length	600 mm
B	Width	30 mm
C	Height	600 mm
D	Length (mounting)	78 mm
E	Width (mounting)	45 mm
	Weight	0.9 kg

## Technical features

1	Article no.	1564000030
2	Light source	LED
3	Luminous flux	300 lm
4	Power compatibility	8 W
5	Energy efficiency	38 lm/W
6	Color rendering index (CRI)	>80
7	Color temperature	3000 K
8	Power factor (cosFI)	> 0,40
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	I
13	Electromagnetic compatibility (EMC)	Yes
14	Climate application	Clm App4
15	Ambient temperature	+5 to +35 C
16	Housing color	Silver
17	Fire protection class	III
18	Flickering	<5%
19	Ingress protection (IP)	IP20
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	D...B
22	Inrush current	-
23	Inrush current impulse time	0 µs
24	Emergency power supply unit	No
25	Beam angle	D120
26	Warranty	60 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-