

VIZART 4000-5 LED SL

VIZART series light signs

Description

Light sign made of aluminum profile. The opening housing wings facilitate pictogram mounting.

Installation




Mounted on the wall or recessed in the wall using brackets. The ST 37 accessory is to be ordered separately.

Design

Aluminum housing. An operational status LED is installed on the housing panel. Emergency lighting testing and control are performed from a TELEMANDO device. Rechargeable batteries are included.

Optical part

Polymeric diffuser in a decorative silver (SL) or white (WH) colored aluminum frame. Pictograms are supplied separately. Recognition distance 25 m.

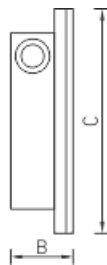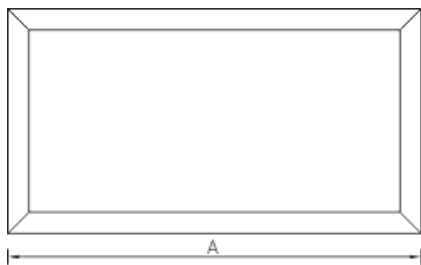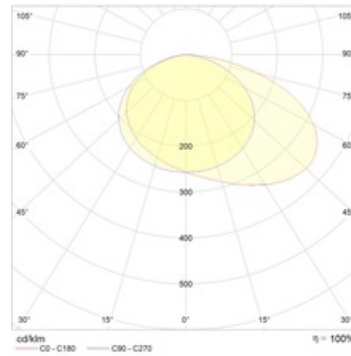

Dimensional characteristics

A	Length	274 mm
B	Width	51 mm
C	Height	159 mm
D	Length (mounting)	226 mm
	Weight	0.9 kg

Technical features

1	Article no.	4502002930
2	Light source	LED
3	Power compatibility	3 W
4	Power factor (cosFI)	-
5	Emergency power supply unit	No
6	Energy efficiency class	D...B
7	Color rendering index (CRI)	-
8	Flickering	-
9	Luminous flux	100 lm
10	Battery Ni-Cd	No accumulator
11	Rated voltage	230 V
12	Electrical shock protection	I
13	Ambient temperature	0 to +40 C
14	Climate application	CIm App4
15	Housing color	Silver
16	Fire protection class	-
17	Electromagnetic compatibility (EMC)	Yes
18	Ingress protection (IP)	IP40
19	Mechanical shock protection	IK02/0,2 J
20	Alternating/direct current (AC/DC)	Yes
21	Autonomy in emergency mode	1
22	Emerg. work type	central battery
23	Average brightness	190
24	Identification distance	25
25	Warranty	60 months
26	Light flux in emergency mode	-