

VIZART 4000-5 LED WH

VIZART series light signs

Description

Light sign made of aluminum profile. The opening housing wings facilitate pictogram mounting.

Installation




Mounted on the wall or recessed in the wall using brackets. The ST 37 accessory is to be ordered separately.

Design

Aluminum housing. An operational status LED is installed on the housing panel. Emergency lighting testing and control are performed from a TELEMANDO device. Rechargeable batteries are included.

Optical part

Polymeric diffuser in a decorative silver (SL) or white (WH) colored aluminum frame. Pictograms are supplied separately. Recognition distance 25 m.

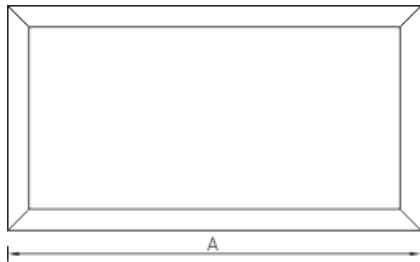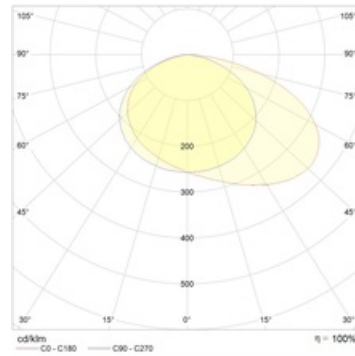

Dimensional characteristics

| | | |
|---|-------------------|--------|
| A | Length | 274 mm |
| B | Width | 51 mm |
| C | Height | 159 mm |
| D | Length (mounting) | 226 mm |
| | Weight | 1 kg |

Technical features

| | | |
|----|-------------------------------------|-----------------|
| 1 | Article no. | 4502002920 |
| 2 | Light source | LED |
| 3 | Power compatibility | 3 W |
| 4 | Power factor (cosFI) | - |
| 5 | Emergency power supply unit | No |
| 6 | Energy efficiency class | D...B |
| 7 | Color rendering index (CRI) | - |
| 8 | Flickering | - |
| 9 | Luminous flux | 100 lm |
| 10 | Battery Ni-Cd | No accumulator |
| 11 | Rated voltage | 230 V |
| 12 | Electrical shock protection | I |
| 13 | Ambient temperature | 0 to +40 C |
| 14 | Climate application | CIm App4 |
| 15 | Housing color | White |
| 16 | Fire protection class | - |
| 17 | Electromagnetic compatibility (EMC) | Yes |
| 18 | Ingress protection (IP) | IP40 |
| 19 | Mechanical shock protection | IK02/0,2 J |
| 20 | Alternating/direct current (AC/DC) | Yes |
| 21 | Autonomy in emergency mode | 1 |
| 22 | Emerg. work type | central battery |
| 23 | Average brightness | 190 |
| 24 | Identification distance | 25 |
| 25 | Warranty | 60 months |
| 26 | Light flux in emergency mode | - |