

## VIZART 4023-5 LED SL

VIZART series light signs

### Description

Light sign made of aluminum profile. The opening housing wings facilitate pictogram mounting.

### Installation




Mounted on the wall or recessed in the wall using brackets. The ST 37 accessory is to be ordered separately.

### Design

Aluminum housing. An operational status LED is installed on the housing panel. Emergency lighting testing and control are performed from a TELEMANDO device. Rechargeable batteries are included.

### Optical part

Polymeric diffuser in a decorative silver (SL) or white (WH) colored aluminum frame. Pictograms are supplied separately. Recognition distance 25 m.

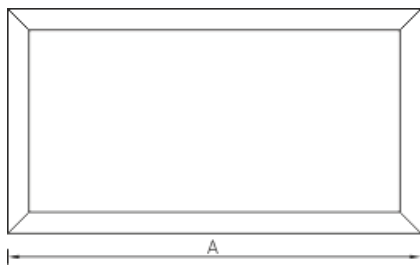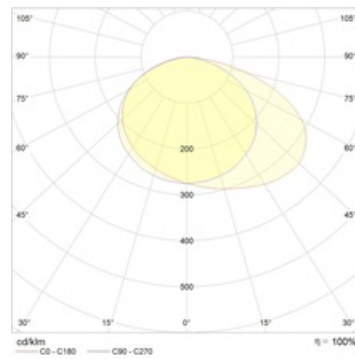

## Dimensional characteristics

A	Length	274 mm
B	Width	51 mm
C	Height	159 mm
D	Length (mounting)	226 mm
	Weight	1.0 kg

## Technical features

1	Article no.	4502002950
2	Light source	LED
3	Power compatibility	4 W
4	Power factor (cosFI)	-
5	Emergency power supply unit	No
6	Energy efficiency class	D...B
7	Color rendering index (CRI)	-
8	Flickering	-
9	Luminous flux	100 lm
10	Battery Ni-Cd	RB 6,0 V 1,2 A*h Ni-Cd
11	Rated voltage	230 V
12	Electrical shock protection	I
13	Ambient temperature	0 to +40 C
14	Climate application	CIm App4
15	Housing color	Silver
16	Fire protection class	-
17	Electromagnetic compatibility (EMC)	Yes
18	Ingress protection (IP)	IP40
19	Mechanical shock protection	IK02/0,2 J
20	Alternating/direct current (AC/DC)	Yes
21	Autonomy in emergency mode	3
22	Emerg. work type	maintained
23	Average brightness	190
24	Identification distance	25
25	Warranty	60 months
26	Light flux in emergency mode	-