

## LINER/S LED CF

Suspended light lines with variable color temperature.

### Description

Suspended modular LED-based lighting system for offices, meeting rooms, corridors, lobbies, and lounges. Modern design, comfortable light, and energy efficiency – these are unbeatable arguments for choosing the Liner LED. The CF series means the possibility of changing the color temperature of light in the range from 2700K to 5700K within the DALI control system of luminaires. OTX LED CF can be part of the automated innovative DALI lighting control system, which simulates a solar cycle of changing color temperature throughout the day, as well as the possibility of manual control of the color temperature of the luminaire using DALI DT8 lighting control devices. In addition to the fact that the luminaire provides the most comfortable lighting and is energy-saving, it can positively influence the working capacity, mood and well-being of a person.

### Installation

Mounted on the ceiling surface using the included wire-rope suspensions (max. 2 m). LINER DR luminaires are designed to be connected in-line. For in-line connection, an end cap kit needs to be ordered that includes 2 end caps and the associated fasteners, order codes (2471000090 End cap set LINER/S DR, LR W). To control the color temperature of the luminaires, a DALI lighting control system is required that supports the latest DALI revision of EN62386 Part 209 in the DALI Device Type 8 (DALI DT8) color temperature management plan.

### Design

White powder-painted aluminium profile housing.

### Optical part

Opal PMMA diffuser. LED type: SMD.

### Usage

Cultural and entertainment facilities

Educational institutions

HoReCa / hotels / restaurants / cafes

Hypermarkets-/supermarkets


Mall

Medical institutions

Office and administrative premises

Stadiums

Stores / boutiques

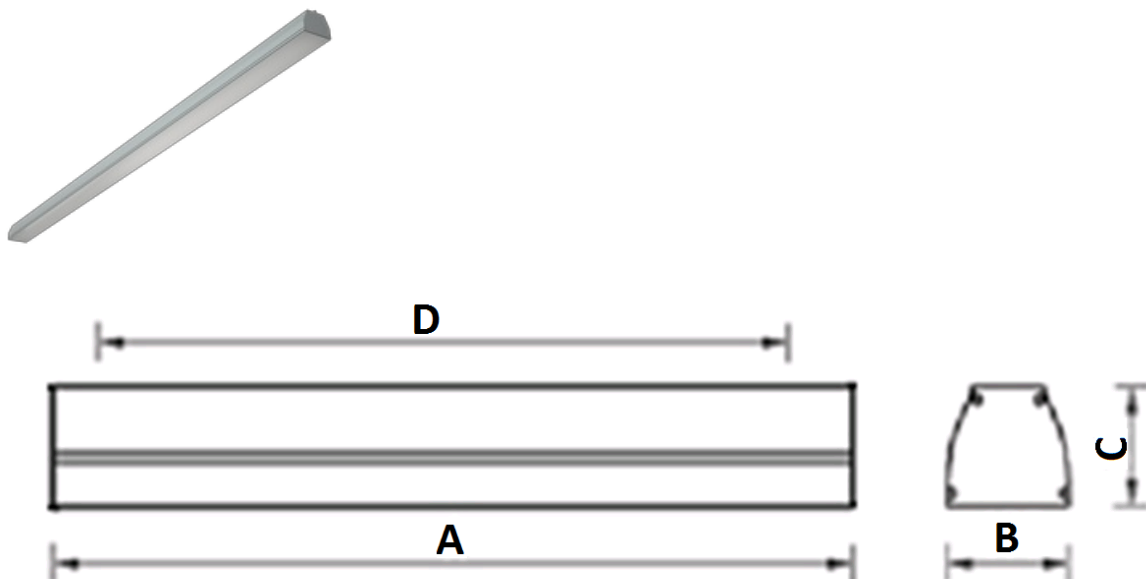

**Models list**

<b>Title</b>	<b>Luminous flux</b>	<b>Power Capability</b>	<b>lm/W</b>	<b>Length</b>	<b>Width</b>	<b>Weight</b>	<b>Article no.</b>
LINER/S DR LED 1200 W CH CF /E/	2200 lm	27 W	81	1140 mm	105 mm	4.400 kg	1997028390
LINER/S CC LED 600 W CH CF /E/	2200 lm	27 W	81	658 mm	581 mm	3.900 kg	1997028380