

LYRA LED

LYRA series luminaires

Description

Lightweight and reliable light sign with a decorative aluminum frame. Universal solution with 30 m recognition distance. The IP65, centrally operated versions work at low down to $-30\text{ }^{\circ}\text{C}$ (parking lots).

Installation

Mounted on a wall or ceiling.

Design

Polycarbonate housing. An operational status LED is installed on the housing panel. Emergency lighting testing and control are performed from a TELEMANDO device. Rechargeable batteries are included.

Optical part

Polycarbonate diffuser. Pictograms are supplied separately. Recognition distance 30 m. LED lamps are included.

Usage

Educational institutions

HoReCa / hotels / restaurants / cafes

Hypermarkets-/supermarkets

Mall


Medical institutions

Office and administrative premises

Stairs / hallways

Stores / boutiques

Transport hubs (railway stations, airports)

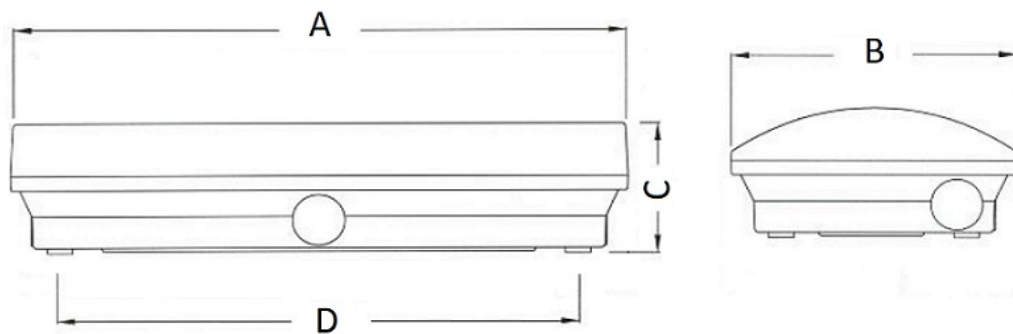

Models list

Title	Emerg. Work Type	Power Capability	Autonomy in emergency mode	Battery Ni-Cd	Average Brightness	Article no.
LYRA 4221-4 LED AT	maintained	4 W	1	RB 6,0 V 0,8 A*h Ni-Cd	300	4502002430
LYRA 6521-4 LED AT	maintained	4 W	1	RB 6,0 V 0,8 A*h Ni-Cd	300	4502002440
LYRA 6521-4 LED	maintained	4 W	1	RB 6,0 V 0,8 A*h Ni-Cd	300	4502000010
LYRA 4223-4 LED	maintained	4 W	3	RB 6,0 V 1,5 A*h Ni-Cd	300	4502000030
LYRA 4200-4 LED	central battery	4 W	-	No accumulator	300	4502002320
LYRA 6523-4 LED	maintained	4 W	3	RB 6,0 V 1,5 A*h Ni-Cd	300	4502000040
LYRA 6500-4 LED	central battery	4 W	-	No accumulator	300	4502002330
LYRA 4221-4 LED	maintained	4 W	1	RB 6,0 V 0,8 A*h Ni-Cd	300	4502000020