

## OKKO IP

Recessed LED-based luminaire

### Description

Recessed LED downlight. The luminaire body is made of aluminum, painted matt paint. Deep mirror decorative frame of mirrored aluminum creates a large protective angle and effect of the "turn off" the light source – "dark light". Optical part closed faceted glass. Standard color: WH – white.

### Installation

Installed in ceilings.

### Design

The body is made of aluminium and painted matte white. Deep decorative frame made from aluminium with mirror surface. Optical part closed by the matt glass.

### Optical part

Diffuser is frosted glass

### Usage

Cultural and entertainment facilities

HoReCa / hotels / restaurants / cafes


Mall

Meeting rooms

Office and administrative premises

Private interiors

Stores / boutiques

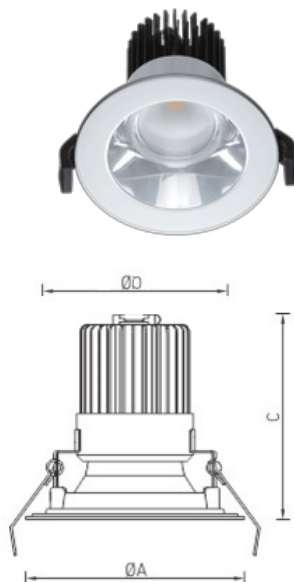

**Models list**

<b>Title</b>	<b>Luminous flux</b>	<b>Power Capability</b>	<b>lm/W</b>	<b>Length</b>	<b>Width</b>	<b>Weight</b>	<b>Article no.</b>
OKKO IP54/IP20 26 WH 4000K (with driver) EM3 /E/	3200 lm	31 W	103	175 mm	0 mm	1.200 kg	1997026510
OKKO IP54/IP20 18 WH 4000K (with driver)	2050 lm	21 W	98	145 mm	0 mm	0.910 kg	1258000240
OKKO IP54/IP20 38 WH 4000K (with driver)	3850 lm	41 W	94	230 mm	0 mm	1.590 kg	1235001270
OKKO IP54/IP20 26 WH 4000K (with driver) /E/	3200 lm	31 W	103	175 mm	0 mm	1.200 kg	1997026500
OKKO IP54/IP20 18 WH 3000K (with driver)	1850 lm	21 W	88	145 mm	0 mm	0.910 kg	1258000230
OKKO IP54/IP20 38 WH 3000K (with driver)	3850 lm	41 W	94	230 mm	0 mm	1.590 kg	1235001260
OKKO IP54/IP20 13 WH 4000K (with driver)	1400 lm	15 W	93	120 mm	0 mm	0.520 kg	1235001230
OKKO IP54/IP20 26 WH 3000K (with driver)	2700 lm	31 W	87	175 mm	0 mm	1.200 kg	1235001240
OKKO IP54/IP20 13 WH 3000K (with driver)	1350 lm	15 W	90	120 mm	0 mm	0.550 kg	1235001220