

OWS/K

IP54 rated luminaires

Description

The luminaire for clean and medical establishments with a higher level of protection from dust and moisture penetration. The luminaire is developed for mounting into the Clip-in ceilings. The combination of a powerful source of light and an opal diffuser provides an equal and soft lighting of a space with a high level of luminous flux.

Installation

Installed recessed in clip-in type suspended cassette ceilings. Orcal 3000 suspension system, type Q (3 mm) and S (3 mm).

Design

White powder-painted weld sheet steel housing. Control gear is installed inside the housing. A silicone seal is attached along the perimeter to ensure the required degree of protection.

Optical part


Opal PMMA diffuser in a metal frame. Secured in the housing with hidden springs.

Usage

Clean room

Industrial enterprises

Medical institutions

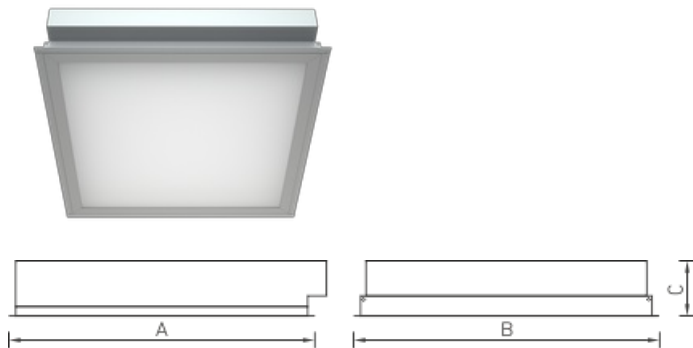

Models list

Title	Number of Lamps	Power Capability	Ballast	Socle	Lamp Type	Length	Width	Article no.
OWS/K 255 /600/ IP54/IP40	2	110 W	ECG	2G11	CFL	600 mm	600 mm	1377000010
OWS/K 255 /625/ IP54/IP54	2	110 W	ECG	2G11	CFL	625 mm	625 mm	1377000050
OWS/K 418 /600/ IP54/IP54 HF	4	72 W	ECG	G13	FL	600 mm	600 mm	1377000020