

PROFILE L

Suspended/surface-mounted profile system

Description

Suspension system based on the profile PROFILE L, creates a diffuse lighting. The body is made of extruded anodized aluminum, diffuser is extruded polycarbonate plastic. End caps are made of aluminum coated with paint "metallic" color. The power supply installed in the ceiling cup or in the ceiling void. Available ready-made models and individual components.

Installation

Suspended to a ceiling.

Design

Anodized extruded aluminum profile housing, extruded polycarbonate profile diffuser. Anodized aluminum end caps and galvanized steel fasteners are supplied separately. The PROFILE L is designed for driver installation inside a ceiling cup or behind a plasterboard ceiling.

Optical part

Extruded polycarbonate profile diffuser.

Usage

Cultural and entertainment facilities

HoReCa / hotels / restaurants / cafes


Mall

Meeting rooms

Office and administrative premises

Private interiors

Stores / boutiques

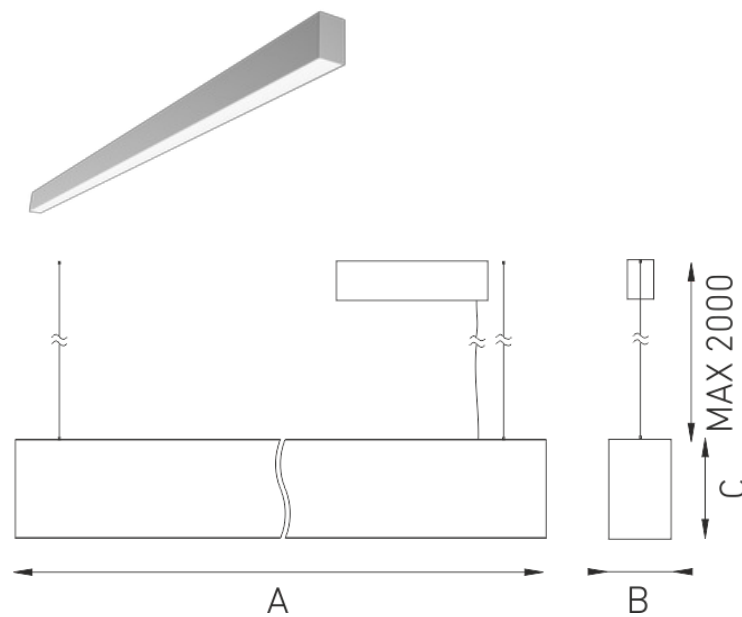

Models list

Title	Luminous flux	Power Capability	lm/W	Length	Width	Weight	Article no.
PROFILE 30L (profile + diffuser 2500mm)	0 lm	0 W	0	2500 mm	38 mm	3.000 kg	2398000070
PROFILE 60L (profile + diffuser 2500mm)	0 lm	0 W	0	2500 mm	60 mm	3.700 kg	2398000090