

RIVAL

Modular suspension system



Description

Modular system using linear fluorescent lamps. The simple and quick installation and the different geometries made possible by the L-, T-, and X-shaped connectors make the RING luminaires an excellent solution for medium-size retail sector.

Installation

Suspended to a ceiling on steel wire ropes or mounted directly on the ceiling surface. The minimum required number of suspensions for an in-line arrangement is $n = N + 1$, where n is the number of suspensions, and N is the number of luminaires connected in-line. Closed circuit connecting nodes need one suspension per node.

Design

White powder-painted aluminum profile housing. A grey (standard) or red/blue/green (optional) decorative insert is fitted into the lengthwise groove in the housing. End caps, connecting elements, and suspension kits are ordered separately.

Optical part


Aluminum reflector. White/metallic louver or polycarbonate diffuser (ordered separately). RIVAL 118, 218: 2 louvers; RIVAL 136, 236, 254: 4 louvers; RIVAL 249, 158, 258: 5 louvers.

Usage

Hypermarkets-/supermarkets

Office and administrative premises

Stores / boutiques

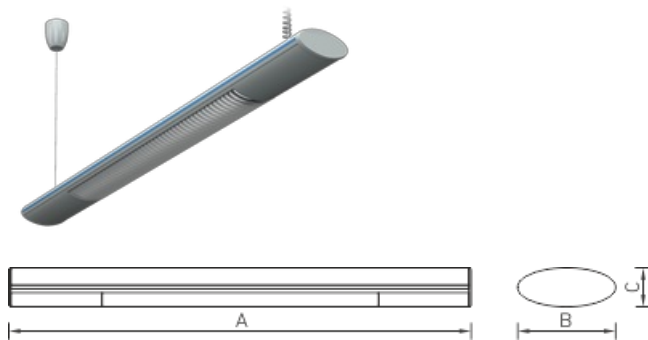

Models list

Title	Number of Lamps	Power Capability	Ballast	Socle	Lamp Type	Length	Width	Article no.
RIVAL 236 HF	2	72 W	ECG	G13	FL	1700 mm	140 mm	1305000220
RIVAL 258 HF	2	116 W	ECG	G13	FL	2000 mm	140 mm	1305000280
RIVAL 249	2	98 W	ECG	G5	FL	2000 mm	140 mm	1305000850
RIVAL 136 HF	1	36 W	ECG	G13	FL	1700 mm	140 mm	1305000070