

TN,TS LED

IP44 rated luminaires

Description

Simple and reliable LED-based luminaires that can be used indoors or outdoors under a canopy (IP44). The unique driverless Acrich technology from Seoul Semiconductor provides high reliability and energy efficiency.

Installation

Mounted on the ceiling/wall surface indoors or under a canopy.

Design

Polycarbonate housing.

Optical part

Polycarbonate diffuser. LED type: SMD.

Usage

Cultural and entertainment facilities

Educational institutions

Housing and public utilities


Mall

Medical institutions

Office and administrative premises

Stairs / hallways

Transport hubs (railway stations, airports)

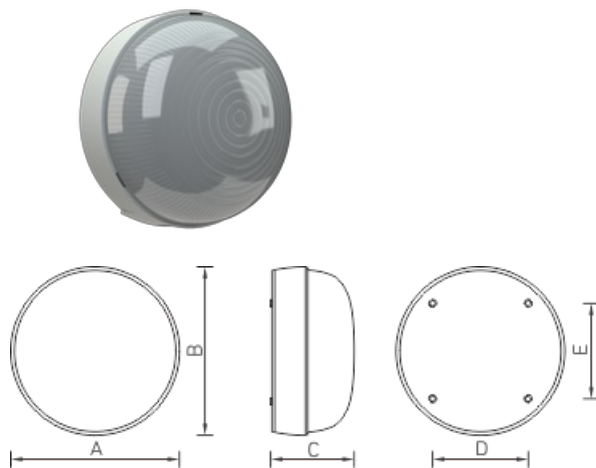

Models list

Title	Luminous flux	Power Capability	lm/W	Length	Width	Weight	Article no.
TN LED 100 4000K /E/	800 lm	11 W	73	236 mm	0 mm	0.570 kg	1997022320
TS LED 100 4000K /E/	800 lm	11 W	73	236 mm	0 mm	0.570 kg	1997022310