

URAN LED

URAN series luminaires

Description

Emergency luminaires with an increased IP rating suitable for a wide range of applications. Can be operated at temperatures below zero.

Installation

Mounted on a wall or ceiling. The ST 35 accessory is supplied separately.

Design

Polycarbonate housing. An operational status LED is installed on the housing panel. Emergency lighting testing and control are performed from a TELEMANDO device. Rechargeable batteries are included.

Optical part

Polycarbonate diffuser. Pictograms for the luminaire and the double-sided ST 35 diffuser are supplied separately. Recognition distance 25 m. The lamps are included.

Usage

Car Park / Parking

Educational institutions

HoReCa / hotels / restaurants / cafes

Hypermarkets-/supermarkets

Mall

Medical institutions


Office and administrative premises

Parking lots / garages

Stairs / hallways

Stores / boutiques

Transport hubs (railway stations, airports)

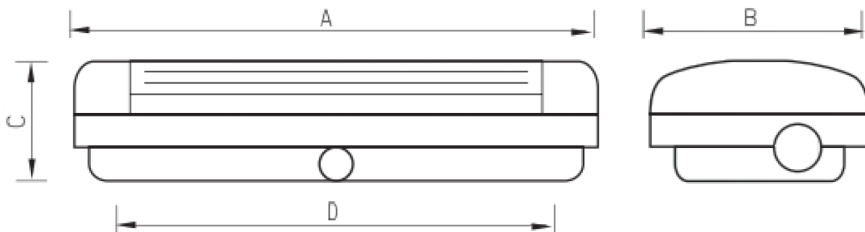

Models list

Title	Emerg. Work Type	Power Capability	Autonomy in emergency mode	Battery Ni-Cd	Average Brightness	Article no.
URAN 6500-4 LED	central battery	4 W	-	No accumulator	300	4501007120
URAN 6523-4 LED	maintained	4 W	3	RB 6,0 V 0,8 A*h Ni-Cd	300	4501006440
URAN 6521-4 LED	maintained	4 W	1	RB 6,0 V 0,8 A*h Ni-Cd	300	4501006430