

VIZART LED

VIZART series light signs

Description

Light sign made of aluminum profile. The opening housing wings facilitate pictogram mounting.

Installation

Mounted on the wall or recessed in the wall using brackets. The ST 37 accessory is to be ordered separately.

Design

Aluminum housing. An operational status LED is installed on the housing panel. Emergency lighting testing and control are performed from a TELEMANDO device. Rechargeable batteries are included.

Optical part

Polymeric diffuser in a decorative silver (SL) or white (WH) colored aluminum frame. Pictograms are supplied separately. Recognition distance 25 m.

Usage

Educational institutions

HoReCa / hotels / restaurants / cafes

Hypermarkets-/supermarkets

Mall



Medical institutions

Office and administrative premises

Stairs / hallways

Stores / boutiques

Transport hubs (railway stations, airports)

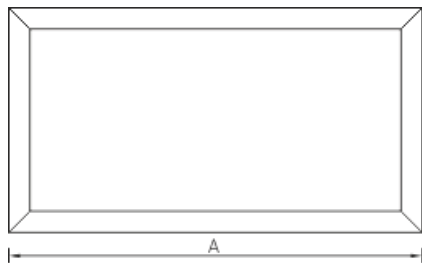

Models list

Title	Emerg. Work Type	Power Capability	Autonomy in emergency mode	Battery Ni-Cd	Average Brightness	Article no.
VIZART 4023-5 LED SL	maintained	4 W	3	RB 6,0 V 1,2 A*h Ni-Cd	190	4502002950
VIZART 4023-5 LED WH	maintained	4 W	3	RB 6,0 V 1,2 A*h Ni-Cd	190	4502002960
VIZART 4000-5 LED SL	central battery	3 W	1	No accumulator	190	4502002930
VIZART 4021-5 LED SL	maintained	4 W	1	RB 6,0 V 0,8 A*h Ni-Cd	190	4502002370
VIZART 4000-5 LED WH	central battery	3 W	1	No accumulator	190	4502002920