

SPLAY 18 WH DWW 4000K (with driver)

Recessed LED-based luminaire-Wall Washer

Description

Recessed LED downlight, made of aluminum, painted matt paint. Optical part protected by glass. Standard color: WH – white. Luminaire optics "WallWasher" – for uniform illumination of walls.

Installation


Installed in ceilings.

Design

The body is made of aluminium. Body painted matte white. Optical part is closing by the matt diffuser.

Optical part

Diffuser is matt polymer material

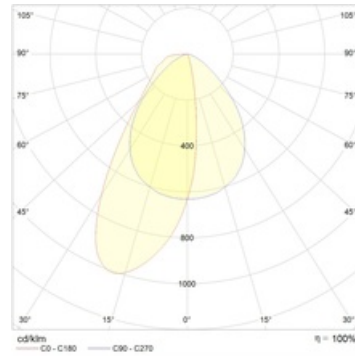

Dimensional characteristics

A	Diameter	170 mm
C	Height	91 mm
D	Diameter (mounting)	150 mm
	Weight	1.2 kg

Technical features

1	Article no.	1239000050
2	Light source	LED
3	Luminous flux	1200 lm
4	Power compatibility	19 W
5	Energy efficiency	63 lm/W
6	Color rendering index (CRI)	>80
7	Color temperature	4000 K
8	Power factor (cosFI)	> 0,86
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	II
13	Electromagnetic compatibility (EMC)	No
14	Climate application	Clim App4
15	Ambient temperature	+5 to +35 C
16	Housing color	White
17	Fire protection class	III
18	Flickering	<10%
19	Ingress protection (IP)	IP20
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	A
22	Inrush current	43 A
23	Inrush current impulse time	2.3 µs
24	Emergency power supply unit	No
25	Beam angle	D120
26	Warranty	60 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-