

## ALBATROS NTK 20 250

Arm-mounted luminaire



### Description

Arm-mounted luminaire for the illumination of large areas and open spaces, highways, and high- and medium-traffic roads. The unique layout and design features make it easy to install and use.

### Installation


Post top or side entry mounting  $\varnothing$  48/60.

### Design

Powder-coated die-cast aluminum housing, cover, and mounting fixture. A quick-detachable metal plate with control gear is mounted inside the housing.

### Optical part

Anodized aluminum reflector. Clear tempered convex protective glass.

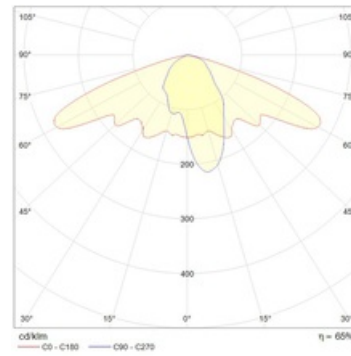

### Dimensional characteristics

A	Length	800 mm
B	Width	370 mm
C	Height	290 mm
	Weight	11 kg

## Technical features

1	Article no.	1413000010
2	Light source	MHL
3	Socle	E40
4	Number of Lamps	1
5	Power compatibility	250 W
6	Ballast	EmCG
7	Dimming	-
8	Power factor (cosFI)	> 0,85
9	Alternating/direct current (AC/DC)	No
10	Rated voltage	230 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	Clm App1
14	Ambient temperature	-40 to +40 C
15	Housing color	Metallic
16	Fire protection class	III
17	Flickering	<40%
18	Ingress protection (IP)	IP65
19	Mechanical shock protection	IK08/6,5 J
20	Energy efficiency class	A...A+
21	Emergency power supply unit	No
22	Beam angle	-