

MAIA S 150/150 WH 60

Surface mounted luminaire

Description

Ceiling surface mounted luminaire creates diffused and direct illumination. Diffuser made of hand blown three-layered opal glass. Ceiling cup and mounting plate made of metal painted mat white.

Installation



Mounted on a wall or ceiling.

Design

Diffuser made from clear smoggy hand-blown glass. Ceiling cup and circuit board made from chromizing metal.

Optical part

Opal diffuser

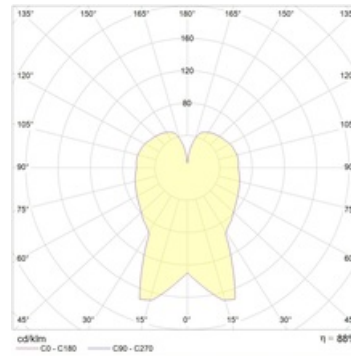

Dimensional characteristics

A	Diameter	150 mm
C	Height	190 mm
D	Diameter (mounting)	150 mm
	Weight	1.4 kg

Technical features

1	Article no.	1535000080
2	Light source	IL
3	Luminous flux	710 lm
4	Power compatibility	60 W
5	Energy efficiency	12 lm/W
6	Color rendering index (CRI)	-
7	Color temperature	-
8	Power factor (cosFI)	= 1,00
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	II
13	Electromagnetic compatibility (EMC)	No
14	Climate application	Clim App4
15	Ambient temperature	+5 to +35 C
16	Housing color	White
17	Fire protection class	III
18	Flickering	<5%
19	Ingress protection (IP)	IP20
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	E
22	Inrush current	-
23	Inrush current impulse time	0 µs
24	Emergency power supply unit	No
25	Beam angle	-
26	Warranty	36 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-