

## NBL 52 F121 black SET

### Wall-mounted luminaires

#### Description

Luminaire for outdoor applications with a high degree of protection. Versions are available with different light sources, from most basic incandescent lamps to high-pressure discharge lamps. Designed for wall mounting.

#### Installation

Mounted on the wall surface.

#### Design

Housing is made of die-cast aluminum. The control gear is mounted on a metal plate inside the housing.


#### Optical part

Opal microprismatic polycarbonate diffuser.

#### Product picture:



#### Light distribution:

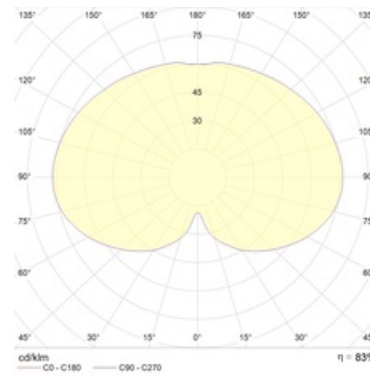

A	Length	547 mm
B	Width	492 mm
C	Height	577 mm
D	Diameter (mounting)	90 mm
	Weight	7.0 kg

## Technical features

1	Article no.	1403000310
2	Light source	CFL
3	Socle	E27
4	Number of Lamps	1
5	Power compatibility	21 W
6	Ballast	EmCG
7	Dimming	-
8	Power factor (cosFI)	> 0,60
9	Alternating/direct current (AC/DC)	No
10	Rated voltage	230 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	CIm App1
14	Ambient temperature	-40 to +40 C
15	Housing color	Black
16	Fire protection class	-
17	Flickering	<40%
18	Ingress protection (IP)	IP55
19	Mechanical shock protection	IK08/6,5 J
20	Energy efficiency class	B...A+
21	Emergency power supply unit	No
22	Beam angle	-